



Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk

Technical details

DRIVE	
Pump Type	
Motor	
Electrical Requirements	
Enclosure Rating	
Thermal Class	
Temperature class	
Bearings	
Operating Modes	
GENERAL DATA	
Pump Housing	
Impellor	
Connection Type	
Connection Size	inch
Maximum Pressure	bar
Liquid Temperature Range	°C
Weight	kg
Min-Maximum Power consumption	W
Min-Maximum Current draw	A
Approvals	
DIMENSIONS	
Port to port length	mm

Heating
Electric with integrated motor protection
230V /1Ph/ 50hz
IP55
F
TF120
Product lubricated special plain bearing
Integrated frequency converter
Cast iron
Composite
DIN PN 6/10
DN65
10
-10 / 110°C
24.2
24.68-619
0.26-2.73
CE,UKCA,WEEE,
340

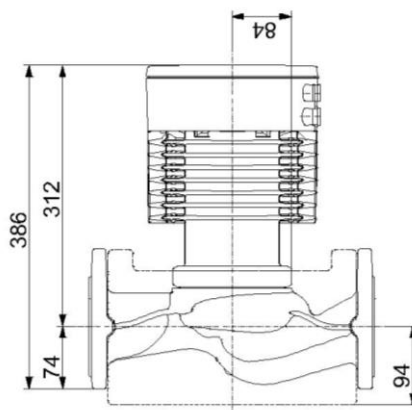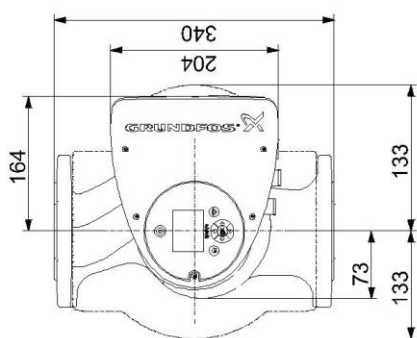

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk

**Pump curve
99221373**

