

TECHNICAL PRODUCT SUBMITTAL

EcoSword LGC285-560



Nominal Input (net)	kW
Nominal Input (gross)	kW
Gas Flow Rate (natural gas)	m3/hr
Nominal Output	kW
EFFICIENCY DATA-Part L2	
Seasonal Efficiency (Part L2 Gross CV)	%
Maintenance consumption value	MJ/M
Maintenance consumption value	kW/24Hr
EFFICIENCY DATA-ErP and Energy Label	
Ecodesign Energy Label rating	
Water Heater efficiency	%
GENERAL DATA	
NOx emission @0% O2	mg/kWh
Recovery Rate @ 44°C	l/hr
Recovery Rate @ 50°C	l/hr
Recovery Rate @ 56°C	l/hr
Dimensions (height)	mm
Dimensions (diameter)	mm
Storage Capacity	litres
Weight (empty)	kg
Weight (full)	kg
Insulation Thickness	mm
Insulation Material	
Hot Outlet Connection (inches)	BSP
Cold Feed Connection (inches)	BSP
Gas Connection (mm)	BSP
Electrical Requirements	
Power Consumption	W
Sound Power Level	LWA(db)
Maximum Flue Gas Temperature	°C
Max Outlet Temperature	°C
Maximum Working Pressure	bar

29.3
32.2
3.07
31.0
96.4
325.8
1.34
A
90
37
614
540
482
1743
610
291
136
427
50
Polyurethane
1"
1"
15
230V/1Ph/50hz
105
58
65
85
8.0

EcoSword water heaters must be installed and maintained in line with the Installation Commissioning and Maintenance Instructions which are available on the Literature & Downloads section of www.lochinvar.ltd.uk

Particular attention should be made to:-


- Dimensions and clearances
- Vented and Unvented installation requirements
- maintenance

ErP and Warranty

ErP Data including Product Fiche and Energy Labels where applicable and Warranty information are also available at www.lochinvar.ltd.uk

TECHNICAL PRODUCT SUBMITTAL

EcoSword LGC285-560

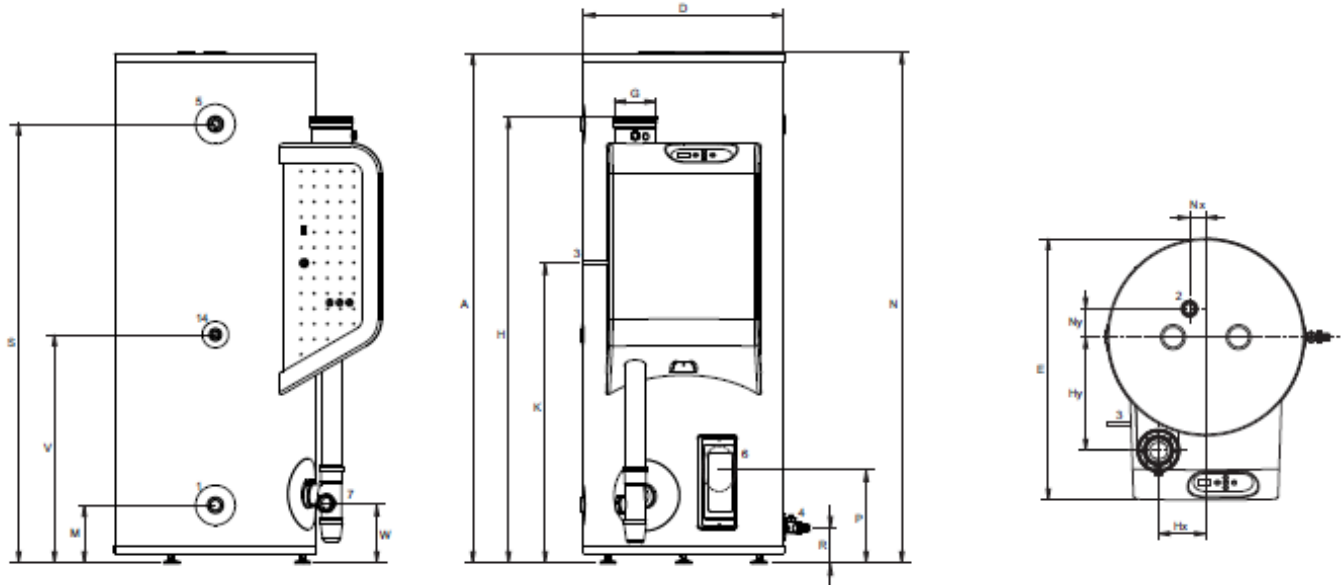

Size	Description	Unit	LGC 245-420	LGC 245-560	LGC 285-420	LGC 285-560	LGC 380-560
A	Total Height	mm	1545	1545	1745	1745	1745
D	Width	mm	610	610	610	610	675
E	Depth	mm	810	810	810	810	875
H	Height of Flue Gas Outlet / Air Supply	mm	1350	1350	1350	1350	1350
Hx	x-Position Flue Gas Outlet	mm	145	145	145	145	145
Hy	y-Position Flue Gas Outlet	mm	350	350	350	350	385
K	Height of Gas Connection	mm	910	910	910	910	910
M	Height of Cold Water Inlet	mm	175	175	175	175	175
N	Height of Hot Water Outlet	mm	1545	1545	1745	1745	1745
Nx	x-Position of Hot Water Outlet	mm	50	50	50	50	50
Ny	y-Position of Hot Water Outlet	mm	90	90	90	90	90
P	Height of Cleaning / Inspection Opening	mm	280	280	280	280	280
R	Height of Drain Valve Connection	mm	105	105	105	105	105
S	Height of T&P-valve Connection	mm	1330	1330	1535	1535	1520
V	Height Recirculation Connection	mm	690	690	690	690	690
W	Height of Condensation Connection (male)	mm	180	180	180	180	180
1	Connection Cold Water Inlet (male)	-	Rp 1	Rp 1	Rp 1	Rp 1	Rp 1
2	Connection Hot Water Outlet (male)	-	Rp 1	Rp 1	Rp 1	Rp 1	Rp 1
3	Connection Gas Inlet (female)	-	15	15	15	15	15
4	Connection Drain Valve (female)	-	Rp 3/4	Rp 3/4	Rp 3/4	Rp 3/4	Rp 3/4
5	Connection T&P-valve (female)	-	Rp 1	Rp 1	Rp 1	Rp 1	Rp 1
6	Cleaning / Inspection Opening	mm	95x70	95x70	95x70	95x70	95x70
7	Connection Condensation Drain (female)		Ø 40	Ø 40	Ø 40	Ø 40	Ø 40
8	Connection Recirculation		Rp 3/4	Rp 3/4	Rp 3/4	Rp 3/4	Rp 3/4
9	Diameter Flue Gas Outlet / Air Supply	mm/mm	80/125	80/125	80/125	80/125	80/125