

TECHNICAL PRODUCT SUBMITTAL

AMICUS LAHP-432HTS STANDARD AIR SOURCE HEAT PUMP

Data	Unit	Model
		LAHP-432HTS
Heating Data		
Heating Capacity (EN14511) ¹	kW	42.3
Total Power input (EN14511) ¹	kW	10
COP (EN14511) ¹	W/W	4.23
Nominal flow rate	m ³ /h	7.36
Pressure drop across the heat pump	kPa	53.7
Design air flow rate	m ³ /h	17974
EcoDesign data ²		
Energy Label Rating Low temperature		A+
SCOP Low Temperature		3.58
Seasonal Efficiency Low temperature	%	140
Energy Label Rating High temperature		A+
SCOP High Temperature		3.02
Seasonal Efficiency High temperature	%	118
Cooling Data		
Cooling Capacity (EN14511) ³	kW	36.4
Total Power input (EN14511) ³	kW	12.9
EER (EN14511) ³	W/W	2.82
Nominal flow rate	m ³ /h	6.19
Pressure drop across the heat pump	kPa	37.9
Design air flow rate	m ³ /h	17143
General data		
Refrigerant		R410A
Compressor Type		E.V.I. Scroll
Number of Compressors		2
Number of Circuits		1
Capacity steps		2
Minimum capacity step	%	50
Sound power level	dB(A)	84
Sound pressure level (10m)	dB(A)	52
Minimum water content in the user circuit	litre	425
Electrical Data		
Power supply	V/Ph/Hz	400/3+N/50
Maximum input power	kW	21.1
Maximum input current standard unit	A	38.4
Peak input current standard unit	A	123
Peak input current unit with soft start option fitted	A	72
Fuse rating (delayed)	A	100
Fans		
Type		Axial EC
Number of fans (standard unit)	n°	2

TECHNICAL PRODUCT SUBMITTAL

AMICUS LAHP-432HTS STANDARD AIR SOURCE HEAT PUMP

LAHP-432HTS			Heating OUT							Max Outlet
Water Delivery Temperature			35C	40C	45C	50C	55C	60C	63C	
Source air temperature	-10	Heat Output (KW)	24.1	24.2	24.3	24.5	24.8	N/A	N/A	55°C
		Efficiency COP	2.4	2.2	2.0	1.9	1.7	N/A	N/A	
	-8	Heat Output (KW)	25.3	25.4	25.6	25.8	26.0	N/A	N/A	55°C
		Efficiency COP	2.6	2.3	2.1	1.9	1.8	N/A	N/A	
	-6	Heat Output (KW)	26.5	26.6	26.7	27.0	27.3	27.6	N/A	60°C
		Efficiency COP	2.7	2.4	2.2	2.0	1.8	1.7	N/A	
	-4	Heat Output (KW)	27.8	28.0	28.1	28.3	28.6	29.0	N/A	60°C
		Efficiency COP	2.8	2.6	2.3	2.1	1.9	1.8	N/A	
	-2	Heat Output (KW)	30.3	30.3	30.5	30.9	31.3	31.7	31.9	63°C
		Efficiency COP	3.0	2.7	2.5	2.3	2.1	1.9	1.8	
	0	Heat Output (KW)	33.1	33.2	33.3	33.7	34.1	34.6	34.9	63°C
		Efficiency COP	3.3	3.0	2.7	2.5	2.2	2.1	2.0	
	2	Heat Output (KW)	35.7	35.9	36.1	36.5	36.9	37.4	37.9	63°C
		Efficiency COP	3.5	3.2	2.9	2.6	2.4	2.2	2.1	
	4	Heat Output (KW)	38.4	38.7	39.0	39.4	39.9	40.5	40.9	63°C
		Efficiency COP	3.7	3.4	3.1	2.8	2.6	2.3	2.2	
	6	Heat Output (KW)	41.4	41.6	42.0	42.4	42.8	43.5	43.9	63°C
		Efficiency COP	4.0	3.7	3.3	3.0	2.7	2.5	2.4	
	7	Heat Output (KW)	42.3	42.5	42.9	43.3	43.8	44.3	44.8	63°C
		Efficiency COP	4.1	3.7	3.4	3.1	2.8	2.5	2.4	
	8	Heat Output (KW)	43.2	43.4	43.8	44.2	44.7	45.2	45.6	63°C
		Efficiency COP	4.2	3.8	3.4	3.1	2.8	2.6	2.4	
	10	Heat Output (KW)	45.1	45.3	45.6	46.0	46.5	47.0	47.4	63°C
		Efficiency COP	4.3	3.9	3.6	3.2	2.9	2.7	2.5	
	15	Heat Output (KW)	50.6	50.6	50.7	51.0	51.4	51.9	52.2	63°C
		Efficiency COP	4.8	4.3	3.9	3.5	3.2	2.9	2.8	
	20	Heat Output (KW)	56.4	56.3	56.2	56.3	56.6	57.0	57.2	63°C
		Efficiency COP	5.3	4.7	4.3	3.8	3.5	3.1	3.0	
	25	Heat Output (KW)	60.8	60.6	60.5	60.6	60.8	61.1	61.4	63°C
		Efficiency COP	5.6	5.1	4.6	4.1	3.7	3.3	3.2	

Amicus air to water heat pumps must be installed and maintained in line with the Installation Commissioning and Maintenance Instructions which are available on the Literature & Downloads section of www.lochinvar.ltd.uk

TECHNICAL PRODUCT SUBMITTAL






AMICUS LAHP-432HTS STANDARD AIR SOURCE HEAT PUMP



model	octave bands (hz)								lw		lp
	63	125	250	500	1k	2k	4k	8k			
	db	db	db	db	db	db	db	db	db	db	db
252HTS	91.1	82.3	76.2	74.7	73.6	68.2	64.8	55.7	91.9	82	50
302HTS	91.1	82.3	76.2	74.7	73.6	68.2	64.8	55.7	91.9	83	51
432HTS	92.1	83.3	77.2	75.7	74.6	69.2	65.8	56.7	92.9	84	52
492HTS	93.1	84.3	79.2	76.7	75.6	70.2	66.8	57.7	93.9	84	52
602HTS	93.1	84.3	79.2	76.7	75.6	70.2	66.8	57.7	93.9	83	51
752HTS	93.1	84.3	79.2	76.7	75.6	70.2	66.8	57.7	93.9	84	52
852HTS	93.1	84.3	79.2	76.7	75.6	70.2	66.8	57.7	93.9	84	52
1002HTS	93.1	84.3	79.2	76.7	75.6	70.2	66.8	57.7	93.9	84	52
1202HTS	93.1	84.3	79.2	76.7	75.6	70.2	66.8	57.7	93.9	87	55
1454HTS	100.1	91.3	85.2	83.7	82.6	77.2	73.8	64.7	100.9	88	56
1654HTS	100.1	91.3	85.2	83.7	82.6	77.2	73.8	64.7	100.9	89	57
1854HTS	101.1	92.3	86.2	84.7	83.6	78.2	74.8	65.7	101.9	88	56
2154HTS	102.1	93.3	87.2	85.7	84.6	79.2	75.8	66.7	102.9	89	57

TECHNICAL PRODUCT SUBMITTAL

AMICUS LAHP-432HTS STANDARD AIR SOURCE HEAT PUMP

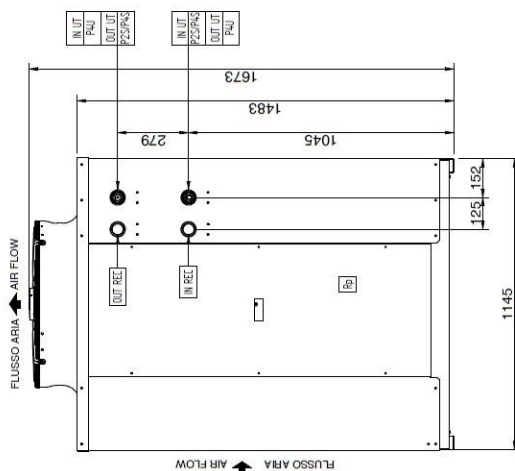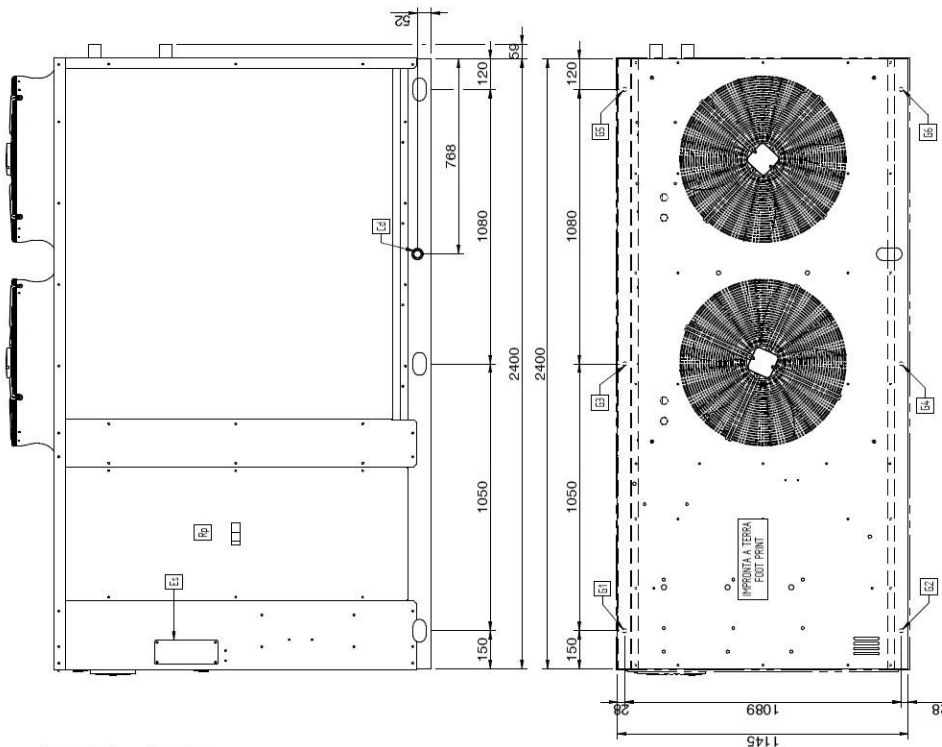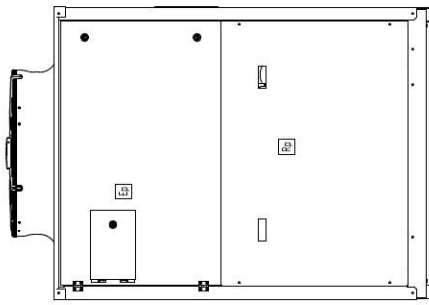

Rp	PANNELLO ASPORTABILE - REMOVABLE PANEL
Ep	QUADRO ELETTRICO - ELECTRICAL PANEL
Es	INGRESSO ALIMENTAZIONE ELETTRICA - POWER SUPPLY INLET
Cd	SCARICO CONDENSA - CONDENSATE DRAIN
IN UT	INGRESSO ACQUA UTENTE - USER WATER INLET
OUT UT	USCITA ACQUA UTENTE - USER WATER OUTLET
IN REC	INGRESSO ACQUA RECUPERO - RECOVERY WATER INLET
OUT REC	USCITA ACQUA RECUPERO - RECOVERY WATER OUTLET
	Ø 1" GAS F
	Ø 1 1/2" GAS M
	Ø 1 1/2" GAS M
	Ø 1 1/2" GAS M
	Ø 1 1/2" GAS M