

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk


TTB+1200

Nominal Input (net) G20	kW	138-1160
Nominal Input (gross) G20	kW	153-1288
Gas Flow Rate (G20)	m3/hr	15.0-123
Output @50/30°C (G20)	kW	145-1219
Output @80/60°C (G20)	kW	135-1133
EFFICIENCY DATA-Part L2		
Seasonal Efficiency (Gross CV)	%	95.81
EFFICIENCY DATA-ErP and Energy Label		
Ecodesign Energy Label rating		N/A
GENERAL DATA		
Emissions of NOx (EN15502-1:2021)	mg/kWh	36.9
Water Content	litres	171.4
Weight (empty)	kg	1330
Weight (full)	kg	1501
Flow Connection (inches)	Victaulic	4"
Return Connection (inches)	Victaulic	4"
Gas Connection (inches)	BSP	2"
Electrical Requirements	V/Hz	400/50-60
Power Consumption	W	2100
Flue Gas Temperature	°C	50-80
Max Outlet Temperature	°C	90
Minimum Working Pressure	bar	1
Maximum Working Pressure	bar	10

TTB+1200



www.lochinvar.ltd.uk

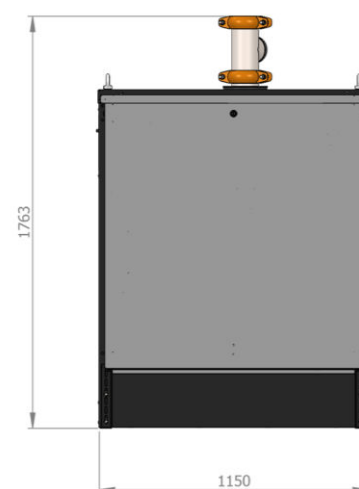

ICOM
International Commission on Missing Persons

Registered office: One New Change, London EC4M 9AF / Registered number: 3453820