

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk

TTB+375

Nominal Input (net) G20	kW	51.4-360
Nominal Input (gross) G20	kW	57.4-400
Gas Flow Rate (G20)	m3/hr	5.4-38.1
Output @50/30°C (G20)	kW	54.0-378
Output @80/60°C (G20)	kW	50.2-352
EFFICIENCY DATA-Part L2		
Seasonal Efficiency (Gross CV)	%	95.46
EFFICIENCY DATA-ErP and Energy Label		
Ecodesign Energy Label rating		N/A
GENERAL DATA		
Emissions of NOx (EN15502-1:2021)	mg/kWh	31.7
Water Content	litres	41.5
Weight (empty)	kg	490
Weight (full)	kg	532
Flow Connection (inches)	Victaulic	2½"
Return Connection (inches)	Victaulic	2½"
Gas Connection (inches)	BSP	2"
Electrical Requirements	V/Hz	230/50-60
Power Consumption	W	450
Flue Gas Temperature	°C	50-80
Max Outlet Temperature	°C	90
Minimum Working Pressure	bar	1
Maximum Working Pressure	bar	10






Technical Product Submittal

TTB+375



Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk

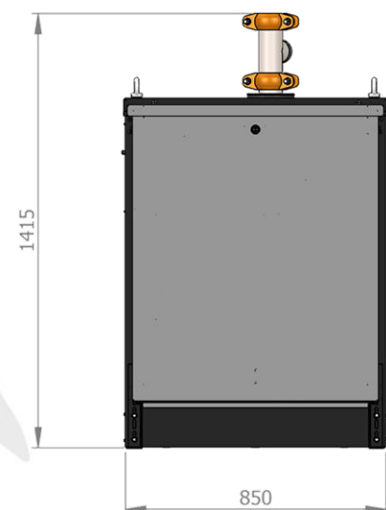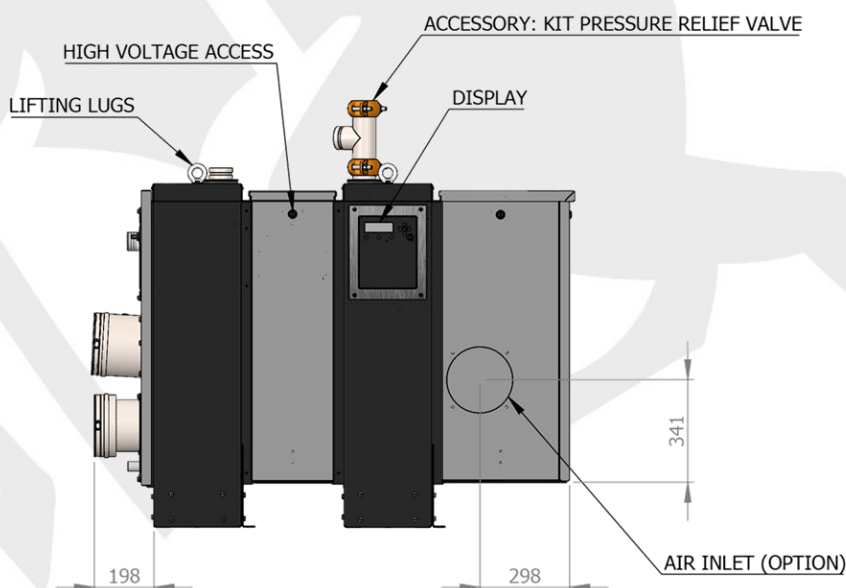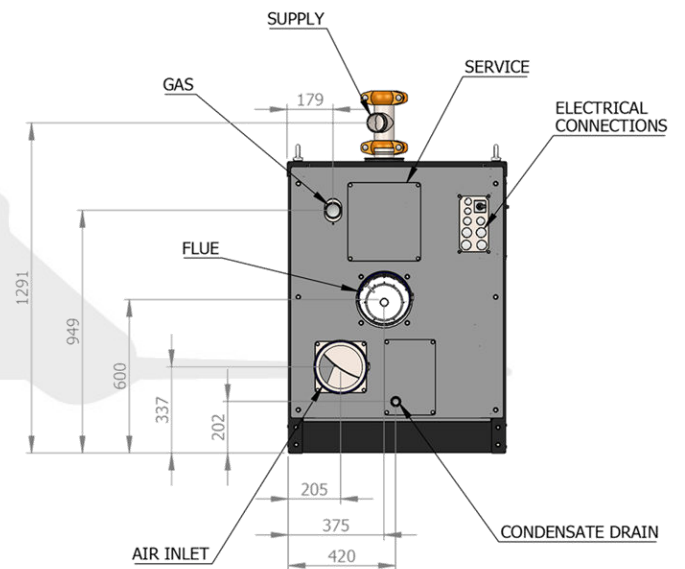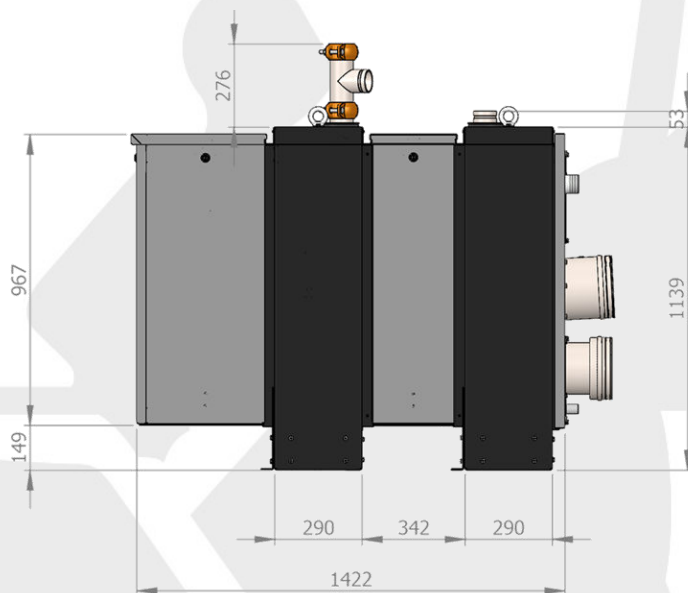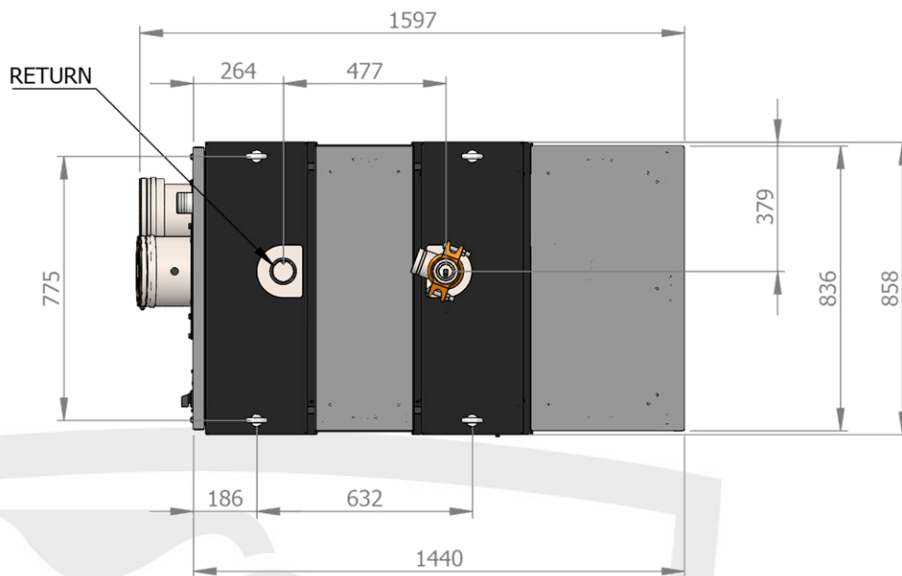

TTB+375 TPS doc_Sept 2026

WEEE Producer Registration Number – WEE/MM6751AA
Comply Direct Membership Number – CD01/01363



Registered office: One New Change, London EC4M 9AF | Registered number: 3453820