

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk






www.lochinvar.ltd.uk

TTB+625

Nominal Input (net) G20	kW	85.0-600
Nominal Input (gross) G20	kW	94.4-666
Gas Flow Rate (G20)	m3/hr	9.2-63.5
Output @50/30°C (G20)	kW	90.9-631
Output @80/60°C (G20)	kW	84.5-586
EFFICIENCY DATA-Part L2		
Seasonal Efficiency (Gross CV)	%	95.62
EFFICIENCY DATA-ErP and Energy Label		
Ecodesign Energy Label rating		N/A
GENERAL DATA		
Emissions of NOx (EN15502-1:2021)	mg/kWh	21.9
Water Content	litres	61.5
Weight (empty)	kg	600
Weight (full)	kg	662
Flow Connection (inches)	Victaulic	2½"
Return Connection (inches)	Victaulic	2½"
Gas Connection (inches)	BSP	2"
Electrical Requirements	V/Hz	230/50-60
Power Consumption	W	1230
Flue Gas Temperature	°C	50-80
Max Outlet Temperature	°C	90
Minimum Working Pressure	bar	1
Maximum Working Pressure	bar	10

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk

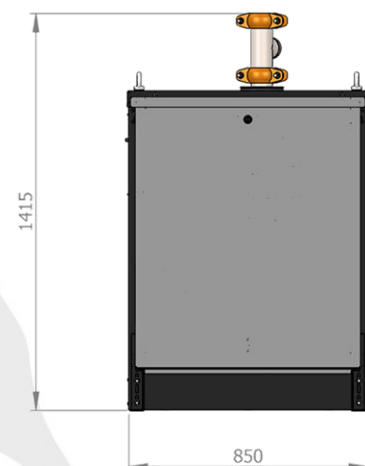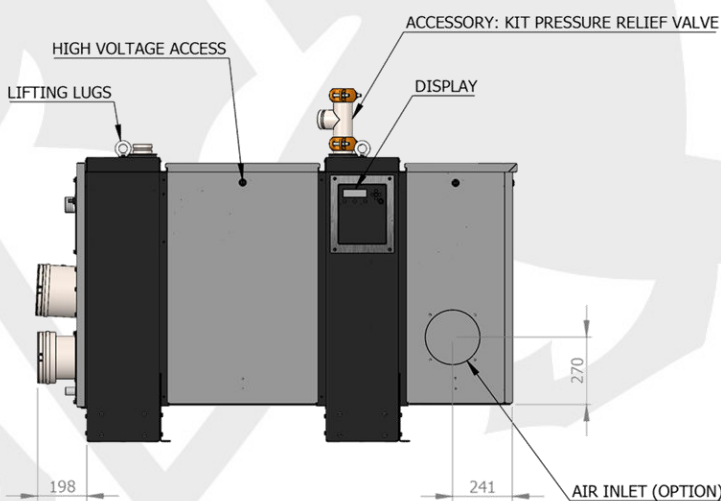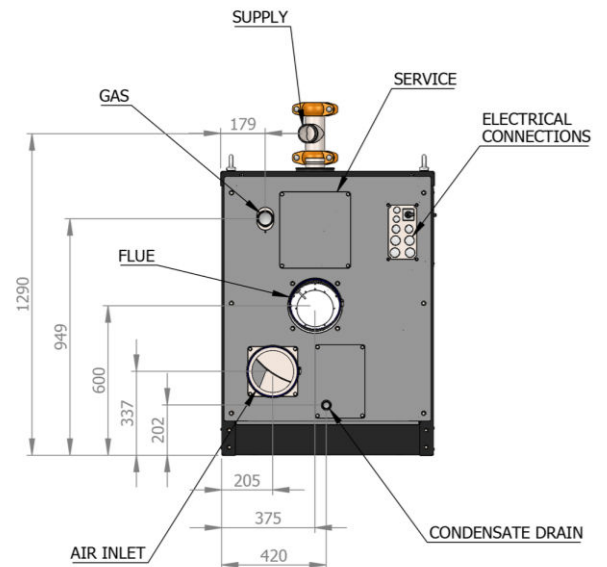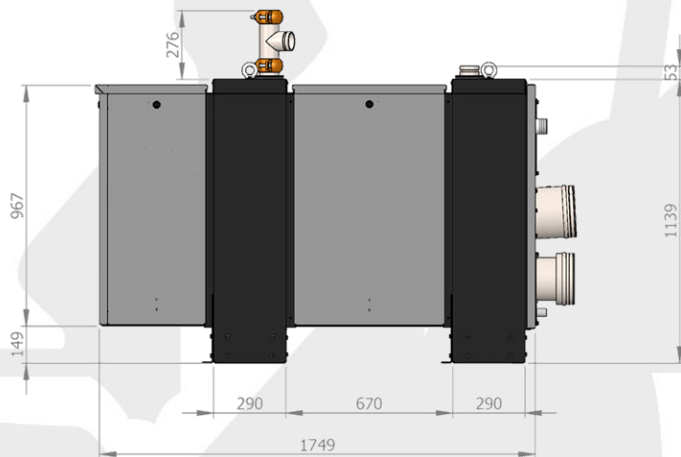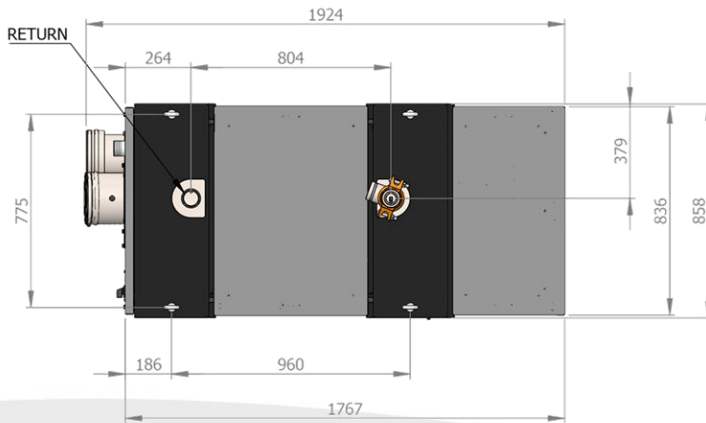

TTB+625 TPS doc_Sept 2026

WEEE Producer Registration Number – WEE/MM6751AA
Comply Direct Membership Number – CD01/01363



Registered office: One New Change, London EC4M 9AF | Registered number: 3453820