

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk

www.lochinvar.ltd.uk






TTB+875

Nominal Input (net) G20	kW
Nominal Input (gross) G20	kW
Gas Flow Rate (G20)	m3/hr
Output @50/30°C (G20)	kW
Output @80/60°C (G20)	kW
EFFICIENCY DATA-Part L2	
Seasonal Efficiency (Gross CV)	%
EFFICIENCY DATA-ErP and Energy Label	
Ecodesign Energy Label rating	
GENERAL DATA	
Emissions of NOx (EN15502-1:2021)	mg/kWh
Water Content	litres
Weight (empty)	kg
Weight (full)	kg
Flow Connection (inches)	Victaulic
Return Connection (inches)	Victaulic
Gas Connection (inches)	BSP
Electrical Requirements	V/Hz
Power Consumption	W
Flue Gas Temperature	°C
Max Outlet Temperature	°C
Minimum Working Pressure	bar
Maximum Working Pressure	bar

122-850
135-944
12.7-89.9
126-893
117-830
95.72
N/A
26.9
130.9
1015
1146
4"
4"
2"
230/50-60
1030
50-80
90
1
10

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk

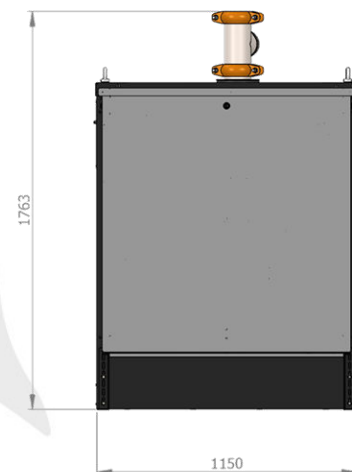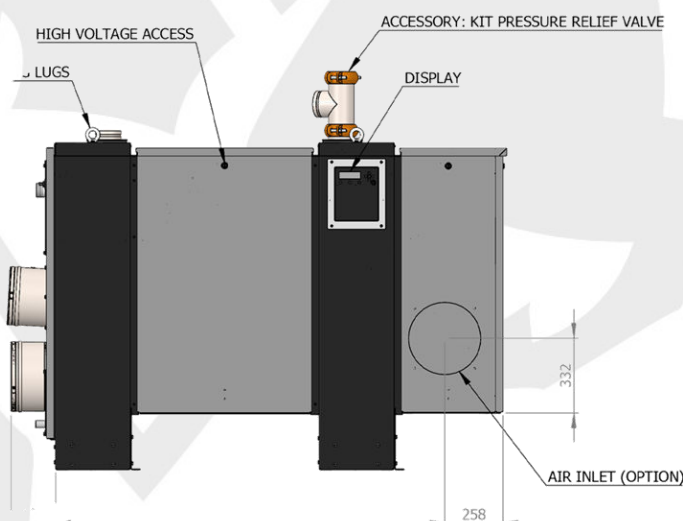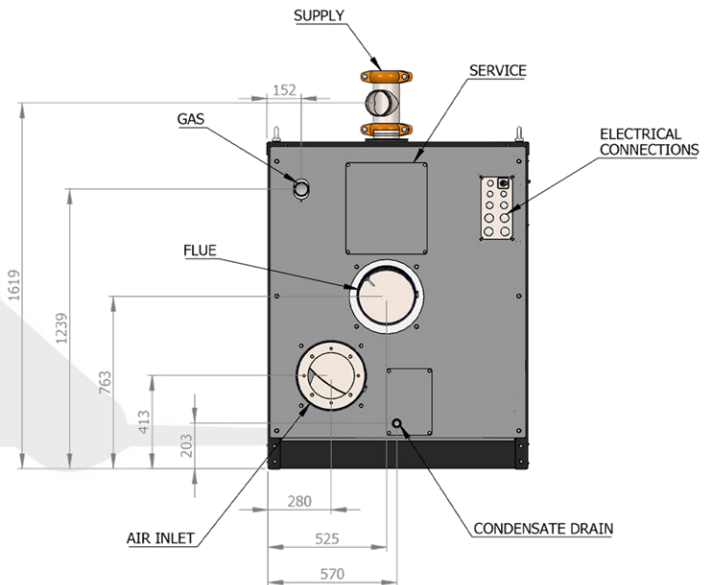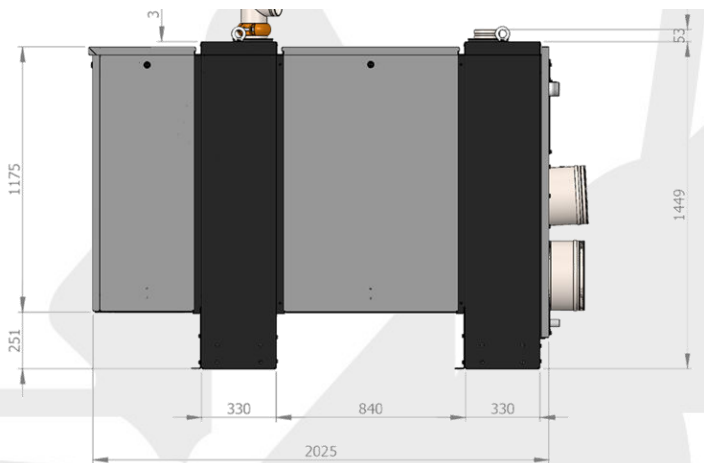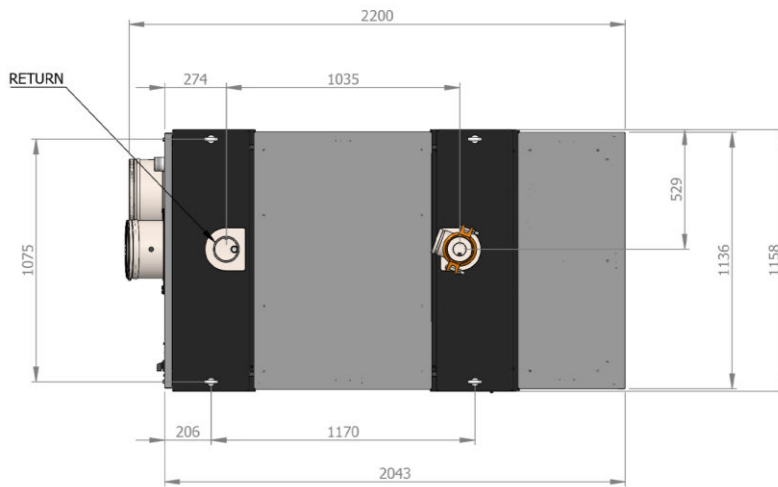

TTB+875 TPS doc_Sept 2026

WEEE Producer Registration Number – WEE/MM6751AA
Comply Direct Membership Number – CD01/01363



Registered office: One New Change, London EC4M 9AF | Registered number: 3453820