

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk
www.lochinvar.ltd.uk


TTW+1200

Nominal Input (net) G20	kW	138-1160
Nominal Input (gross) G20	kW	153-1288
Gas Flow Rate (G20)	m3/hr	15.0-123
Output @50/30°C (G20)	kW	145-1219
Output @80/60°C (G20)	kW	135-1133
EFFICIENCY DATA-Part L2		
Heat generator seasonal efficiency	%	92.5
EFFICIENCY DATA-ErP and Energy Label		
Ecodesign Energy Label rating		N/A
Water Heater Efficiency	%	87.9
GENERAL DATA		
NOx emission @0% O2	mg/kWh	36.9
Recovery Rate @ 44°C	l/hr	23828
Recovery Rate @ 50°C	l/hr	20969
Recovery Rate @ 56°C	l/hr	18722
Water Content	litres	171.4
Weight (empty)	kg	1330
Weight (full)	kg	1501
Flow Connection (inches)	Victaulic	4"
Return Connection (inches)	Victaulic	4"
Gas Connection (inches)	BSP	2"
Electrical Requirements	V/Hz	400/50-60
Power Consumption	W	2.100
Maximum Flue Gas Temperature	°C	50-80
Max Outlet Temperature	°C	85
Minimum Working Pressure	bar	1
Maximum Working Pressure	bar	10

Lochinvar Ltd
8 Lombard Way
The MXL Centre, Banbury
Oxon, OX16 4TJ

+44 (0) 1295 269981
info@lochinvar.ltd.uk

www.lochinvar.ltd.uk

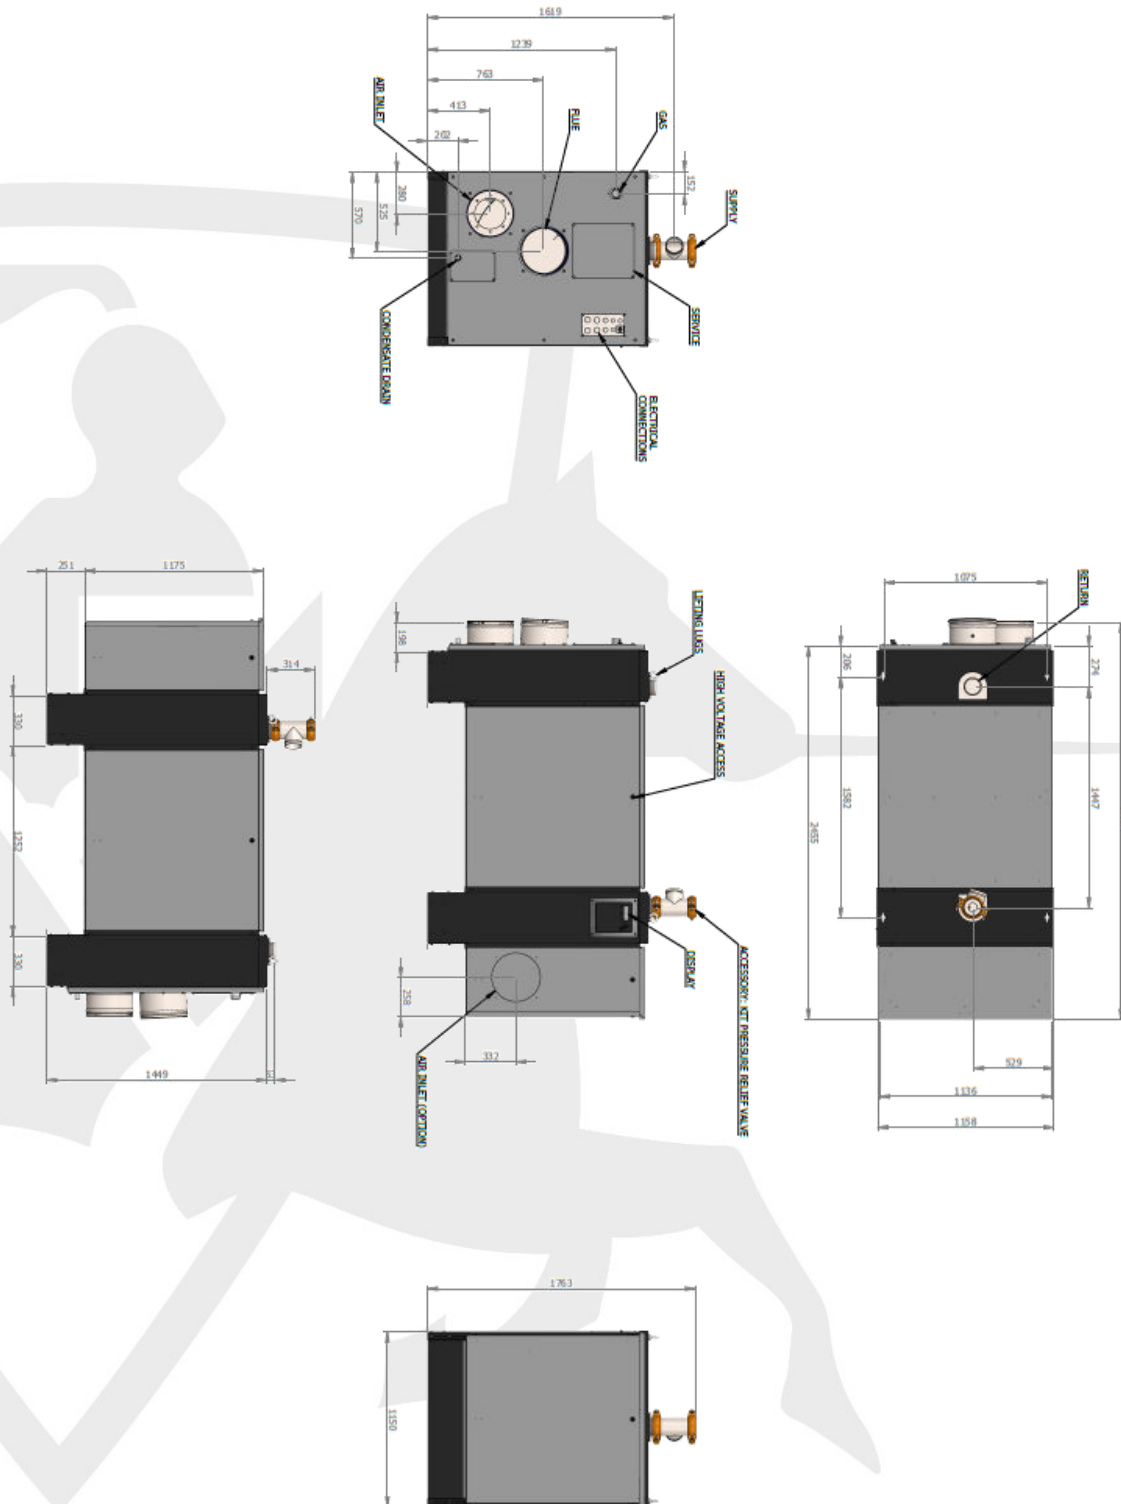

TTW+1200 TPS doc_Sept 2026

WEEE Producer Registration Number – WEE/MM6751AA

Comply Direct Membership Number – CD01/01363



Registered office: One New Change, London EC4M 9AF | Registered number: 3453820